



# Glo Brite® Ecō Exit™ 7200 | 7300 Series P50 Exit Signs



Going green does not have to be expensive

Job Name: _____
Type: _____
Approved By: _____
Distributor: _____

### FEATURES:

- Requires no additional electricity to operate
- Reliability
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Designed for surface mounting
- Can be used for both high-level and low-level applications
- Requires virtually no maintenance, periodic inspections, for 25+ years
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Saves on energy cost

### TECHNICAL INFORMATION:

Sizes: 7.5" x 13" x .075"  
 Letter size: .8125" stroke with 6" height  
 Background: Photoluminescent  
 Illumination: High Visibility Green  
 Visibility: 50 feet  
 Directional: 2 included (Field Applied)  
 Construction: Plastic photoluminescent panel/red or green lettering with black plastic frame  
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

### TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL;  
 Meets NFPA Life Safety Code 101 and OSHA requirements; California State Fire Marshal listing #6200-1617:100; City of Los Angeles Research Report: RR 25531 (CSI #16530); Ontario Building Material Evaluation Commission Authorization Report BMEC #03-12-291; CCMC Evaluation Report CCMC 13211-R National Research Council Canada; International Building Code 2009;  
 International Fire Code 2009

**LIFE EXPECTANCY:** 25+ years

### POWER REQUIREMENTS:

NO additional electrical or mechanical source required


### INSTALLATION:

Surface mounted. Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

### APPLICATIONS:

Both high-level and low-level  
 Suitable for floor proximity installation

Catalog #	Letter Style	Letter Color	Chevrons
7	2 - Printed Letters	1 - Red	0 - With Chevrons (field applied) included
	3 - Reflective Letters	2 - Green	
7	_____	_____	0 (fill in for model #)

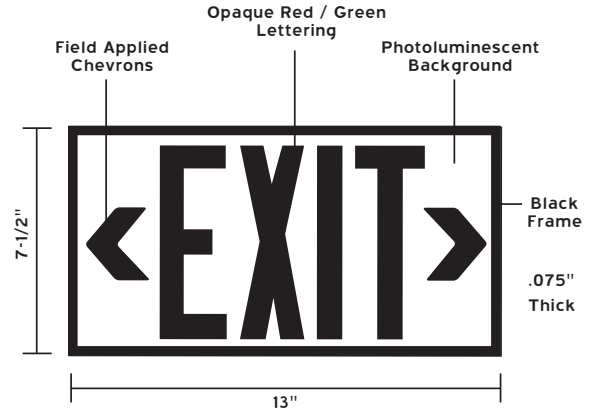

Jessup Manufacturing Company  
 ph: 815.385.6650  
 fax: 815.385.0079  
 Internet: www.globritesystem.com  
 E-mail: jmc@jessupmfg.com



Other photoluminescent components of the Glo Brite® Safety Guidance System include:  
 Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows,  
 Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.