




# GLO BRITE® DOTS AND ARROWS


When utilizing photoluminescent Glo Brite® Dots and Arrows to indicate an emergency evacuation route, the directional possibilities are endless. These important safety markings absorb and store energy from ambient light, and are clearly visible in the event of blackout or very smoky conditions. Glo Brite® Dots and Arrows easily affix to most surfaces, making these photoluminescent direction indicators perfect for your low-level emergency egress system.

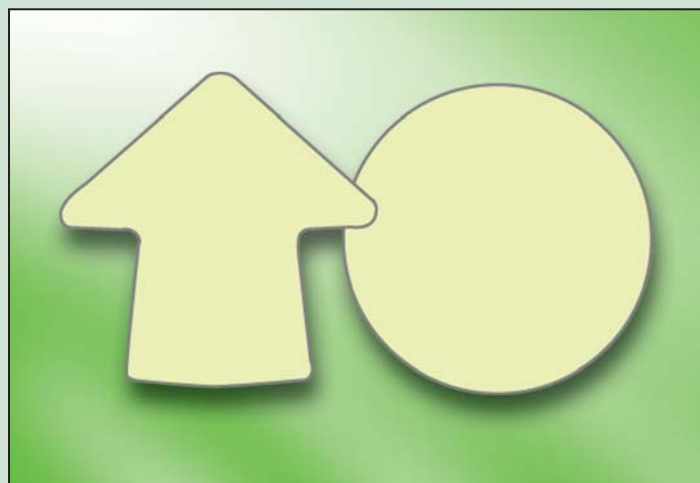

© Jessup 2006

# GLO BRITE® FILM & RIGID SHEETS

Glo Brite® Film and Rigid sheets are available in a bulk format. Glo Brite® 7500 Series films are stocked in 54" and 27" x 150ft. rolls and 20" x 27" sheets (100 sheets/cs). Glo Brite® 7500 Series Rigid sheets are stocked in a 24" x 40" size (10 sheets/cs). Custom roll and sheet sizes are available upon request.

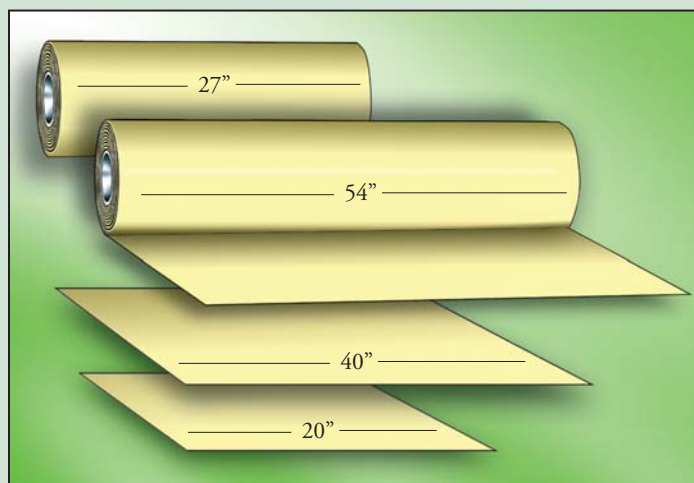

© Jessup 2006

PRODUCT	NUMBERS
Glo Brite® 7520 Series	7520 – 3 – CIR – 20 7520 – 3 – ARW – 20
Glo Brite® 7530 Series	7530 – 3 – CIR – 20 7530 – 3 – ARW – 20
Glo Brite® 7550-HT Series	7550-HT – 3 – CIR – 20 7550-HT – 3 – ARW – 20

PRODUCT	NUMBERS
Glo Brite® 7520 Series	7520 – 54 x 150 – T 7520 – 20 x 27 7520 – 24 x 40 – R
Glo Brite® 7530 Series	7530 – 54 x 150 – T 7530 – 20 x 27 7530 – 24 x 40 – R
Glo Brite® 7550 Series	7550 – 27 x 150 – T
Glo Brite® 7560 Series	7560 – 27 x 150 – T

TECHNICAL DATA	
Construction:	Flexible laminated film, coated with permanent acrylic pressure-sensitive adhesive and backed by poly-coated release liner
Thickness:	.010 +/- 10% (film/adhesive)
Color:	White/Green (normal light conditions)
Illumination:	High Visibility Yellow/Green
UV Stability:	Excellent
Installation:	Position, peel-off backing and apply to dry, non-oily surface Minimum application temperature 50° F
Availability:	Dots – 3" circles (200 pieces per case) (20pc/pack) Arrows – 3" arrows (200 pieces per case) (20pc/pack) Custom sizes and shapes available upon request

TECHNICAL DATA	
Construction:	Two formats: 1) Flexible laminated film, coated with permanent acrylic pressure-sensitive adhesive and backed by poly-coated release liner 2) Rigid lamination
Thickness:	Two formats: 1) Flexible laminated film - .010 +/- 10% (film/adhesive) 2) Rigid lamination - .060 +/- 10%
Color:	White/Green (normal light conditions)
Illumination:	High Visibility Yellow/Green
UV Stability:	Excellent
Availability:	Film – 54" x 150ft. rolls 27" x 150ft. rolls 20" x 27" sheets Rigid – 24" x 40" sheets