


GLO BRITE® TAPE

Using the latest photoluminescent technology, Glo Brite® Tape is a flexible laminated film that absorbs and stores energy from ambient light. In the event of a power outage this tape is immediately visible, providing people with a clearly illuminated evacuation route. Because Glo Brite® Tape easily affixes to walls, handrails, columns, around doorframes, and along stairways and baseboards, it is ideal for your low-level emergency egress system.

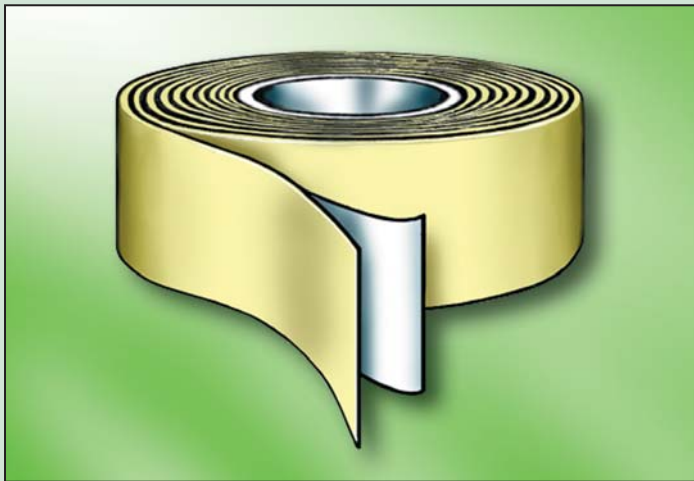

© Jessup 2006


PRODUCT NUMBERS

Glo Brite® 7520	Glo Brite® 7530	Glo Brite® 7550	Glo Brite® 7550-HT	Glo Brite® 7560
7520 – 1 (6 rls/cs)	7530 – 1 (6 rls/cs)	7550 – 1 (6 rls/cs)	7550 – HT – 1 (6 rls/cs)	7560 – 1 (6 rls/cs)
7520 – 2 (3 rls/cs)	7530 – 2 (3 rls/cs)	7550 – 2 (3 rls/cs)	7550 – HT – 2 (3 rls/cs)	7560 – 2 (3 rls/cs)
7520 – 3 (2 rls/cs)	7530 – 3 (2 rls/cs)	7550 – 3 (2 rls/cs)	7550 – HT – 3 (2 rls/cs)	7560 – 3 (2 rls/cs)
7520 – 6 (1 rl/cs)	7530 – 6 (1 rl/cs)	7550 – 6 (1 rl/cs)	7550 – HT – 6 (1 rl/cs)	7560 – 6 (1 rl/cs)

(* 7550 – HT (High Tack) designed for low energy surfaces and porous substrates)

GLO BRITE® EGRESS PATHWAY STRIPS

Glo Brite® Egress Pathway Strips are durable aluminum extrusions with inset photoluminescent tape. Designed to absorb and store energy from ambient light, these strips are immediately visible in the event of a blackout. Glo Brite® Egress Pathway Strips affix easily to walls and along handrails to provide a continuous egress pathway in an emergency.

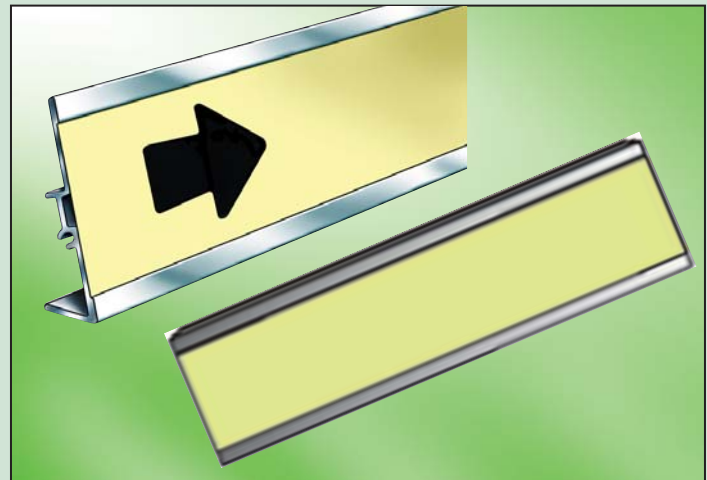

© Jessup 2006

PRODUCT

NUMBERS

Aluminum / Plastic Extrusions -

Glo Brite® 7500 – EXT – 2X6
EXT – 2

Tape – (sold separately)

Glo Brite® 7520 – 1" / 2"
Glo Brite® 7530 – 1" / 2"
Glo Brite® 7550 – 1" / 2"
Glo Brite® 7560 – 1" / 2"

End Caps

Glo Brite® 7500 – END CAP – 10

TECHNICAL DATA

Construction:	Flexible laminated film, coated with permanent acrylic pressure-sensitive adhesive and backed by poly-coated release liner
Thickness:	.010 +/- 10% (film/adhesive)
Color:	White/Green (normal light conditions)
Illumination:	High Visibility Yellow/Green
UV Stability:	Excellent
Installation:	Position, peel-off backing and apply to dry, non-oily surface Minimum application temperature 50° F
Availability:	1", 2", 3", and 6" x 30FT. Rolls Custom sizes and shapes available upon request

TECHNICAL DATA

Construction:	Aluminum extrusion with photoluminescent 2" tape inset Plastic extrusion with photoluminescent 1" tape inset
Dimensions:	Aluminum extrusion: .60" x 2.314" x 8 ft. Plastic extrusion: 1/4" x 1-3/8" x 8 feet includes Welmount™ foam tape for easy mounting Glo Brite® Tape: 1" x 30 feet (6 rolls/case) 2" x 30 feet (3 rolls/case) End Caps: 1-9/32" x 2-3/8" (nominal)
Color:	Aluminum extrusion: Silver Plastic extrusion: Ivory Glo Brite® Tape: White/Green under normal light conditions
Illumination:	High Visibility Yellow/Green
UV Stability:	Excellent
Installation:	Affix to most surfaces using screws and anchors (provided)
Availability:	Aluminum extrusion: .60" x 2.314" x 8 feet lengths Plastic extrusion: 1/4" x 1-3/8" x 8 feet lengths (10 ea. per bundle) Glo Brite® Tape: 1" x 30-ft. rolls (sold separately) 2" x 30-ft. rolls (sold separately) End Caps: 10 pc/bag (sold separately)