



Glo Brite® 7280 Series P50 Exit Signs

Going green does not have to be expensive

FEATURES:

- Requires no additional electricity to operate
- Reliability
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Designed for surface mounting
- Can be used for both high-level and low-level applications
- Requires virtually no maintenance, periodic inspections, for 25+ years
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Saves on energy cost

TECHNICAL INFORMATION:

Sizes: 10" x 17" x .075"

Letter size: .8125" stroke with 8" height

Background: Photoluminescent

Illumination: High Visibility Green

Visibility: 50 feet

Directional: 2 included (Field Applied)

Construction: Plastic photoluminescent panel/red lettering

Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL

Meets NFPA Life Safety Code 101 and OSHA requirements

International Building Code 2009/2012/2015

International Fire Code 2009/2012/2015

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:

NO additional electrical or mechanical source required

INSTALLATION:


Surface mounted. Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

APPLICATIONS:

Both high-level and low-level

Suitable for floor proximity installation

| |
|--------------------|
| Job Name: _____ |
| Type: _____ |
| Approved By: _____ |
| Distributor: _____ |

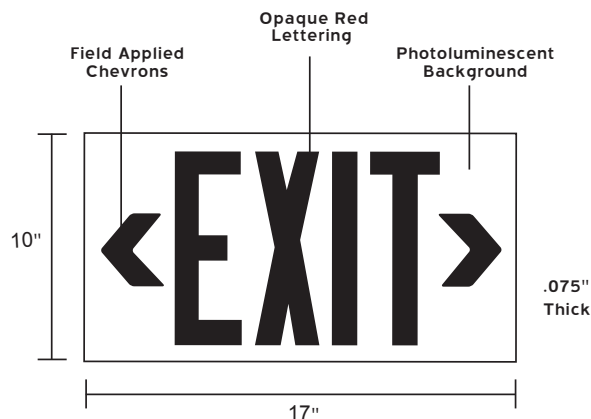

Jessup Manufacturing Company
ph: 815.385.6650 fax: 815.385.0079
Internet: www.jessupmfg.com
E-mail: jmc@jessupmfg.com



Other photoluminescent components of the Glo Brite® Safety Guidance System include: Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows, Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.