

Glo Brite® 7000 Series PF50 Exit Signs

Going green does not have to be expensive

FEATURES:

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- 50 feet rated, visibility, readability
- Recyclable
- LEED points qualified

TECHNICAL INFORMATION:

Sizes: 15-3/8" x 8-3/4" x 3/4"
 Letter size: 7/8" stroke with 7" height
 Background: Black, Red, Green, White
 Illumination: High Visibility Green
 Rated Viewing Distance: 50 feet
 Directional: (2) Chevron arrows included for easy direction selection
 Construction: ABS plastic with photoluminescent panel
 Durability: Explosion-proof/Suitable for floor proximity installation

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL;
 Meets NFPA Life Safety Code 101 and OSHA requirements;
 International Building and Fire Code 2009, 2012, 2015
 Listed for LED lighting.

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:

NO additional electrical or mechanical source required

INSTALLATION:

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of LED, fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)


APPLICATIONS:

Both high-level and low-level
 Suitable for floor proximity installation

Catalog #	Frame Color	No. of Faces	Mounting Bracket	
70	4 - Green	0 - Single Sided	B - Bracket	
	5 - Red	2 - Double Sided	CDT-B - Conduit Bracket	
	6 - Black			
70	_____ - _____ (fill in for model #) For example: 7062-B (Double sided Black with bracket)			
Catalog #	Frame Color	Letter Outline	No. of Faces	Mounting Bracket
7	1 - White	2 - Green	0 - Single Sided	B - Bracket
		3 - Red	2 - Double Sided	CDT-B - Conduit Bracket
7	_____ - _____ (fill in for model #) For example: 7120-B (Single sided White with Green Outline with Bracket)			

Other photoluminescent components of the Glo Brite® Safety Guidance System include: Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows, Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.

Job Name: _____
 Type: _____
 Approved By: _____
 Distributor: _____

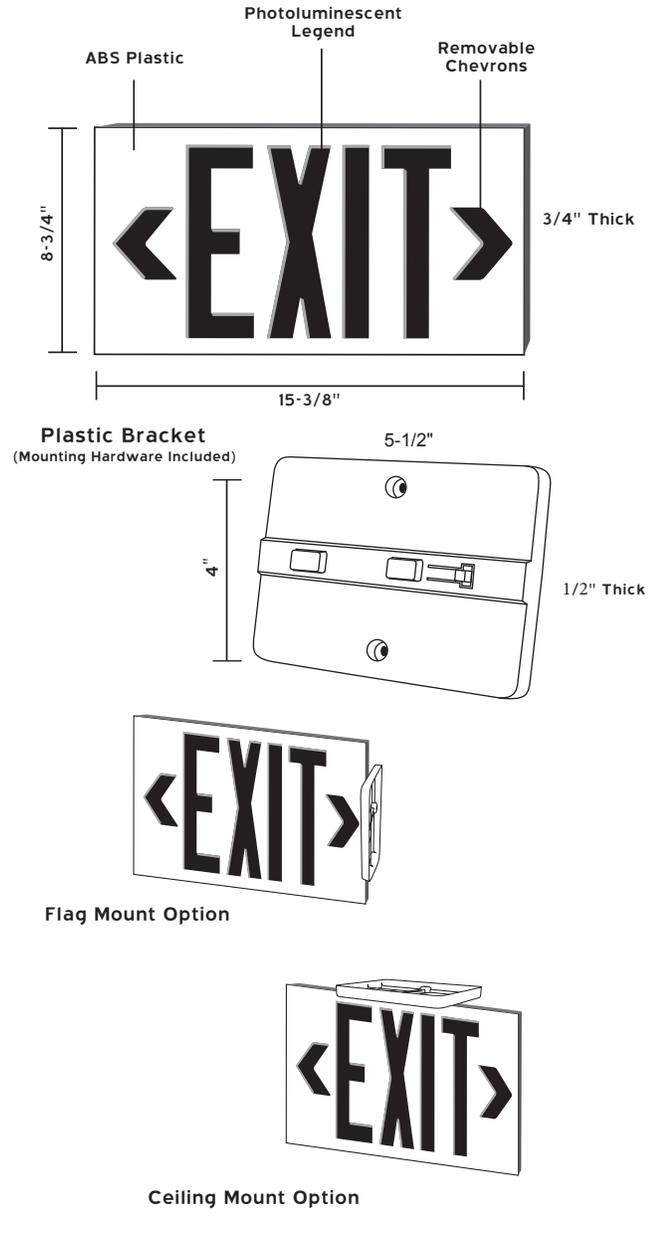

Jessup Manufacturing Company
 ph: 815.385.6650 fax: 815.385.0079
 Internet: www.jessupmfg.com
 E-mail: jmc@jessupmfg.com

