

# Glo Brite® P50 Running Man

*Going green does not have to be expensive*

Job Name: _____
Type: _____
Approved By: _____
Distributor: _____

**FEATURES:**

- Zero energy consumption- zero cost, green design
- Zero maintenance- no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal costs
- Designed for surface flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Easily movable if egress path changes
- Thin, low profile construction
- Consistent, uniform illumination
- 15.25 m rated, visibility, readability
- Recyclable
- LEED point contributor

**TECHNICAL INFORMATION:**

Sizes:

- Aluminum Framing system-RM with arrow- 43.8 cm x 25.4 cm x 1.9 cm
- Aluminum Framing system-RM- 25.4 cm x 25.4 cm x 1.9 cm
- Acrylic Framing system- RM with arrow- 41.275 cm x 30.48 cm x 2.54 cm
- Acrylic Framing system- RM- 30.48 cm x 23.5 cm x 2.54 cm

- Illumination: High Visibility Green
- Rated Viewing Distance: 15.25 meters
- Directional: Included-Running Man with or without arrow
- Construction: Aluminum Framing System or Acrylic face with aluminum extrusion
- Durability: Explosion-proof/Suitable for Floor Proximity Installation

**TESTS PASSED:**

CAN/ULC S572  
Standard for Photoluminescent and Self Luminous Exit Signs and Path Marking Systems  
Meets NBC 2010/2015  
21.6 lx at 30 minutes Listing for LED, Fluorescent, Metal Halide, Mercury Vapor  
54 lx at 120 minute Listing for Fluorescent, Metal Halide, Mercury Vapor

**LIFE EXPECTANCY:** 25+ years

**POWER REQUIREMENTS:**




NO additional electrical or mechanical source required

**INSTALLATION:**

Surface, flag or ceiling mounted. Before installation it must be determined that there is a minimum of 21.6 lx LED or 54 lx of light on the face(s) of the sign at all times during building occupancy.

**APPLICATIONS:**

Both high-level and low location  
Suitable for floor proximity installation

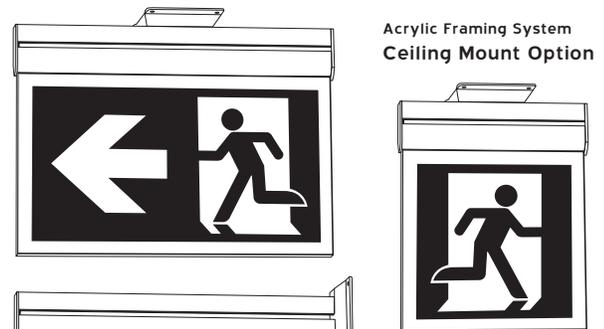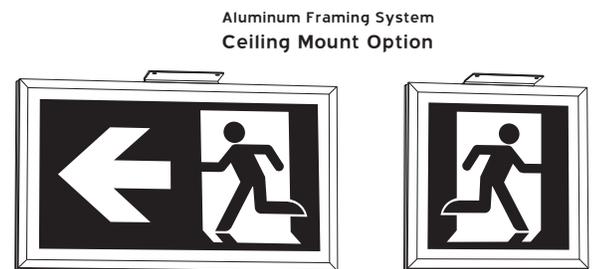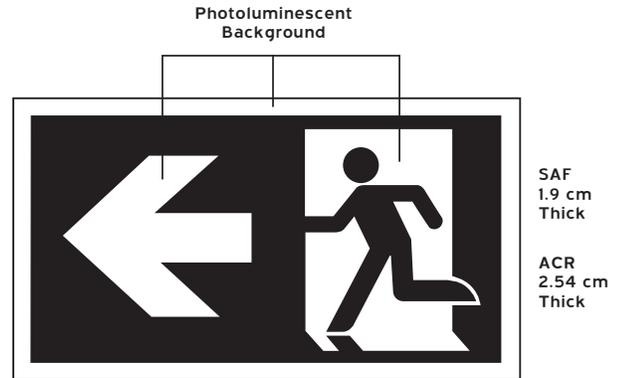

Catalog #	RM	RM facing	Arrow	Min. Illum	Frame	No. of faces	Mounting Bracket
72	30 -no arrow	L-left		2-21.6 lx	SAF- Silver aluminum	2-double sided	B
	31 -with arrow	R-right	A-arrow	5-54 lx	ACR-Acrylic		
72	_____	_____	_____	_____	_____	_____	B

(fill in for model #)