

Glo Brite® P50 Running Man

Going green does not have to be expensive

Job Name: _____
Type: _____
Approved By: _____
Distributor: _____

FEATURES:

- Zero energy consumption- zero cost, green design
- Zero maintenance- no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal costs
- Designed for surface flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Easily movable if egress path changes
- Thin, low profile construction
- Consistent, uniform illumination
- 15.25 m rated, visibility, readability
- Recyclable
- LEED point contributor

TECHNICAL INFORMATION:

Sizes:

Aluminum Framing system-RM with arrow- 43.8 cm x 25.4 cm x 1.9 cm

Aluminum Framing system-RM- 25.4 cm x 25.4 cm x 1.9 cm

Acrylic Framing system- RM with arrow- 41.275 cm x 30.48 cm x 2.54 cm

Acrylic Framing system- RM- 30.48 cm x 23.5 cm x 2.54 cm

- Illumination: High Visibility Green
- Rated Viewing Distance: 15.25 meters
- Directional: Included-Running Man with or without arrow
- Construction: Aluminum Framing System or Acrylic face with aluminum extrusion
- Durability: Explosion-proof/Suitable for Floor Proximity Installation

TESTS PASSED:

CAN/ULC S572

Standard for Photoluminescent and Self Luminous

Exit Signs and Path Marking Systems

Meets NBC 2010/2015

21.6 lx at 30 minutes Listing for LED, Fluorescent, Metal Halide, Mercury Vapor

54 lx at 120 minute Listing for Fluorescent, Metal Halide, Mercury Vapor

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:

NO additional electrical or mechanical source required




INSTALLATION:

Surface, flag, ceiling or stem mounted. Before installation it must be determined that there is a minimum of 21.6 lx LED or 54 lx of light on the face(s) of the sign at all times during building occupancy.

APPLICATIONS:

Both high-level and low location

Suitable for floor proximity installation

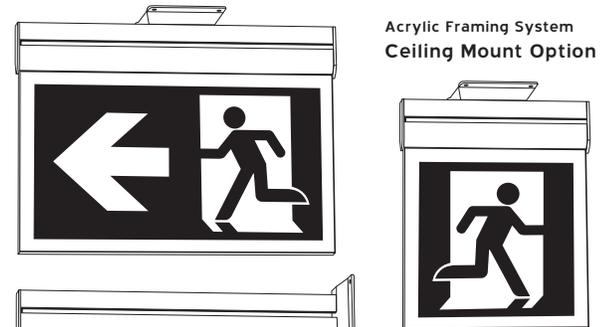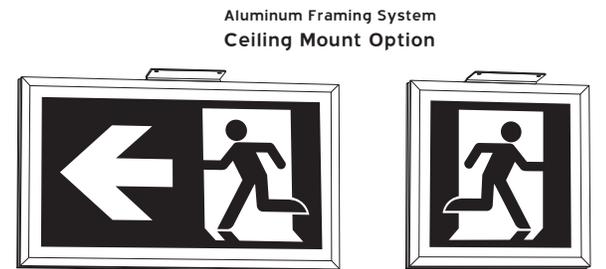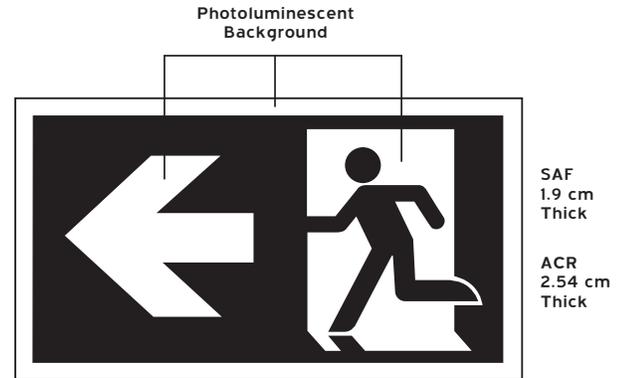

Catalog #	RM	RM facing	Arrow	Min. Illum	Frame	No. of faces	Mounting Bracket
72	30 -no arrow	L-left		2-21.6 lx	SAF- Silver aluminum	2-double sided	B
	31 -with arrow	R-right	A-arrow	5-54 lx	ACR-Acrylic		
72	_____	_____	_____	_____	_____	_____	B

(fill in for model #)