

Glo Brite® 7000 Series PF50 Exit Signs

Going green does not have to be expensive

FEATURES:

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- 50 feet rated, visibility, readability
- Recyclable
- LEED points qualified

TECHNICAL INFORMATION:

Sizes: 15-3/8" x 8-3/4" x 3/4"
 Letter size: 7/8" stroke with 7" height
 Background: Black, Red, Green, White
 Illumination: High Visibility Green
 Rated Viewing Distance: 50 feet
 Directional: (2) Chevron arrows included for easy direction selection
 Construction: ABS plastic with photoluminescent panel
 Durability: Explosion-proof/Suitable for floor proximity installation

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL;
 Meets NFPA Life Safety Code 101 and OSHA requirements;
 International Building and Fire Code 2009, 2012, 2015
 Listed for LED lighting.

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:

NO additional electrical or mechanical source required

INSTALLATION:

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of LED, fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)



APPLICATIONS:

Both high-level and low-level
 Suitable for floor proximity installation


| Catalog # | Frame Color | No. of Faces | Mounting Bracket | |
|-----------|--|------------------|--------------------------------|--------------------------------|
| 70 | 4 - Green | 0 - Single Sided | B - Bracket | |
| | 5 - Red | 2 - Double Sided | CDT-B - Conduit Bracket | |
| | 6 - Black | | | |
| 70 | _____ - _____ (fill in for model #) For example: 7062-B (Double sided Black with bracket) | | | |
| Catalog # | Frame Color | Letter Outline | No. of Faces | Mounting Bracket |
| 7 | 1 - White | 2 - Green | 0 - Single Sided | B - Bracket |
| | | 3 - Red | 2 - Double Sided | CDT-B - Conduit Bracket |
| 7 | _____ - _____ (fill in for model #) For example: 7120-B (Single sided White with Green Outline with Bracket) | | | |

Other photoluminescent components of the Glo Brite® Safety Guidance System include: Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows, Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.

Job Name: _____
 Type: _____
 Approved By: _____
 Distributor: _____

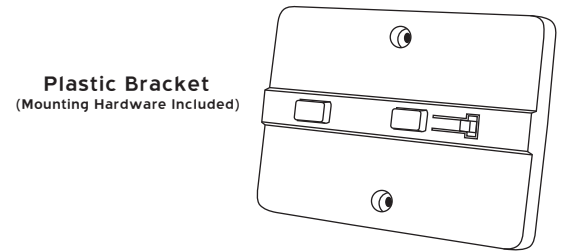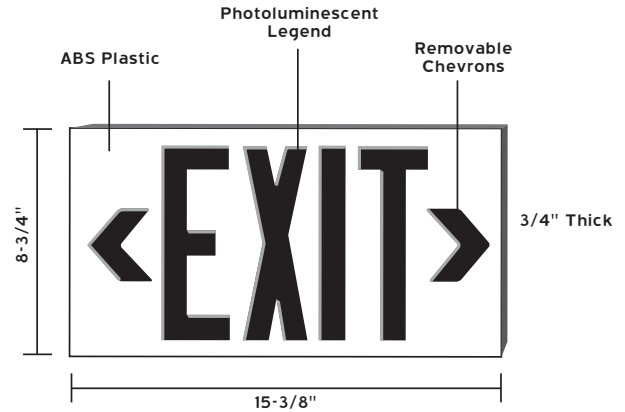

Flag Mount Option



Ceiling Mount Option

